

Ferrite EMI Disks and Plates


Steward's Ferrite Disks and Plates provide a simple, cost-effective solution for radiated and inductively-coupled electromagnetic interference. After the PC board soldering process, a ferrite disk or plate can be installed directly on the source of EMI (such as active devices or unwanted antennas).

Features:

- Easy installation • Each part for volume production is provided with permanent, double sided 3.5 mil acrylic adhesive with 218 oz./inch² adhesion. • Samples and sample kits are available with removable and reusable adhesive for "trial and error" testing • Variety of sizes offered • For frequencies above 250 MHz, H series material is generally better than M series material • Custom parts also available.

Applications:

- **Steward** ferrite disks and plates can be utilized either as inductively-coupled components or EMI shields on PC board components and traces. (Inductive coupling occurs when the ferrite affects the conducted wave form leaving the active component. The rise time of the wave form is effectively slowed by the ferrite, and the overshoot and associated ringing are attenuated. EMI shielding occurs when the ferrite absorbs the radiated emissions from active components, effectively protecting other boards or components in the vicinity from radiated contamination). • Can be used to locate unwanted EMI antennas. • Flat Flex & Ribbon cables. • Can also provide retrofit, auxiliary EMI attenuation.

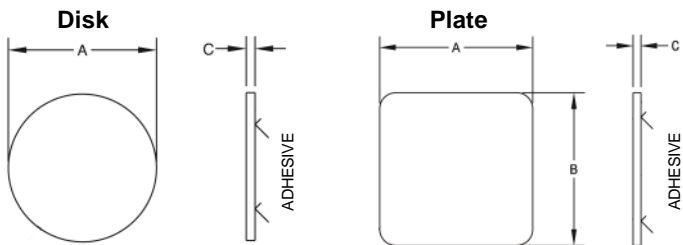


PART NUMBERING SYSTEM			
<u>H</u>	<u>M</u>	<u>0787</u>	<u>100</u>
H - MATERIAL	M - DISK	PART SIZE IDENTIFICATION	THICKNESS CODE
M - MATERIAL	P - PLATE		

PART NUMBER	A mm (inches)	B mm (inches)	C mm (inches)
HM0787-100	20.00 (0.787)		1.27 (0.050)
HM0787-200	20.00 (0.787)		1.91 (0.075)
HM1400-200	35.56 (1.400)		1.91 (0.075)
HM1400-300	35.56 (1.400)		2.54 (0.100)
MM0650-100	16.51 (0.650)		1.27 (0.050)
MM0787-100	20.00 (0.787)		1.27 (0.050)
MM0787-200	20.00 (0.787)		1.91 (0.075)
MM1400-200	35.56 (1.400)		1.91 (0.075)
MM1400-300	35.56 (1.400)		2.54 (0.100)
HP1040-100	26.42 (1.040)	26.42 (1.040)	1.27 (0.050)
HP1040-200	26.42 (1.040)	26.42 (1.040)	1.91 (0.075)
MP0315-200	8.00 (0.315)	8.00 (0.315)	2.00 (0.079)
MP0350-000	26.42 (1.040)	8.89 (0.350)	1.27 (0.050)
MP0433-000	11.00 (0.433)	11.00 (0.433)	1.96 (0.077)
MP0512-200	13.00 (0.512)	13.00 (0.512)	2.00 (0.079)
MP0590-200	21.00 (0.827)	15.00 (0.591)	2.00 (0.079)
MP0591-200	15.00 (0.591)	15.00 (0.591)	2.00 (0.079)
MP0760-100	19.30 (0.760)	19.30 (0.760)	1.27 (0.050)
MP1040-100	26.42 (1.040)	26.42 (1.040)	1.27 (0.050)
MP1040-200	26.42 (1.040)	26.42 (1.040)	1.91 (0.075)
MP1496-000	38.00 (1.496)	38.00 (1.496)	2.00 (0.079)

EXAMPLE APPLICATION

MP1040-100 and HP1040-100

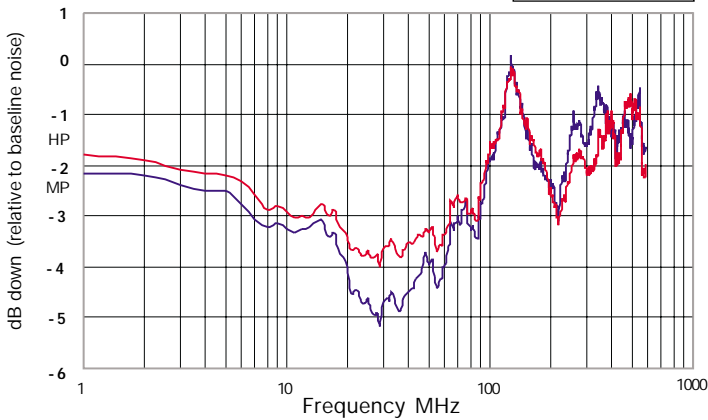

Example Application Graph Explanation:

The zero line on the graph represents the base line noise recorded for an unprotected microprocessor. The curves (dB down) represent the performance of the Steward ferrite plates relative to the baseline. The addition of the ferrite plates to the top of the processor in this specific application exhibits up to a 5 dB EMI reduction relative to the unprotected part. In the example application graph above, the ferrite plate MP1040-100 exhibits up to a 1 dB advantage over the HP1040-100 from 1-100 MHz, while the HP1040-100 exhibits a 0.5 dB advantage between 200 and 400 MHz. Performance can vary with different sizes, materials, processors and applications.

Test Conditions:

- Microprocessor — Motorola HC16 • Clock Speed — 16 MHz • Mini-Tem radiated emissions using an sbec3a tem cell board
- Sweep Rate — 100 s • No. of Sweeps — 1 • Resolution BW — 10 kHz • Video BW — 30 kHz • Amplification — 31.00 dB

Steward
www.steward.com

North America - U.S.A. • Phone: +1 423 308 1690 • Fax +1 423 308 1622 • e-mail: americas@steward.com
 North America - Mexico • Phone: +52 662 260-4832 • Fax: +52 662 216 1202 • e-mail: mexico@steward.com
 Europe - Scotland, UK • Phone: +44 (0)1506 414200 • Fax +44 (0)1506 410694 • e-mail: europe@steward.com
 Asia / Pacific - Singapore • Phone: +65 6272 2646 • Fax : +65 6272 6165 • e-mail: asia@steward.com
 China • Phone: +86-757-2563 8860 • Fax : +86-757-2563 8862 • e-mail: china@steward.com

BROCH 013
REV 4.10 12/2004

Ferrite disc & plate samples are available with temporary adhesive so the sample part can be tested in numerous locations. Production parts have permanent adhesive. Custom parts available.

Steward produces an extensive line of ferrite products for Inductive and EMI Filtering Applications. Products include ferrite EMI cable cores, connector plates, unique common mode chokes, can-bus chokes, high current thru hole and surface mount components, impedance chip beads, surface mount inductors, toroid inductor cores and ferrite powders. Please consult our web site, Steward's EMI and Inductive Components full catalog, or contact your nearest Steward office or representative for additional information.

Steward North America

1200 East 36th Street
P.O. Box 510
Chattanooga, Tennessee 37401-0510
U.S.A.
Phone: +1-423-308-1690
Fax: +1-423-308-1622
e-mail: americas@steward.com

Steward Mexico

Ave. Obrero Mundial # 9
Parque Industrial Dynatech
Hermosillo, Sonora 83170
Mexico
Phone: +52 662 260-4832
Fax: +52 662 216 1202
e-mail: mexico@steward.com

Steward Europe

5 Cochrane Square
Brucefield Industry Park
Livingston EH54 9DR
Scotland, UK
Phone: +44-(0)-1506-414200
Fax: +44-(0)-1506-410694
e-mail: europe@steward.com

Steward Asia / Pacific

3791 Jalan Bukit Merah
#10-14, E-Centre @ Redhill
159471
Singapore
Phone: +65 6272 2646
Fax: +65 6272 6165
email: asia@steward.com

Steward China

Fuan Industrial Zone, Leliu Town
Shunde District, Foshan City,
Guangdong Province
P.R. China 528322
Phone: +86-757-2563 8860
Fax: +86-757-2563-8862
email: china@steward.com